



## Riva 66 Wood Burning Inset Fires & Multi-fuel Inset Fires

---

Not only will this magnificent landscape Stovax Riva™ 66 inset fire provide you with significant heating capacity but it will also be a stunning focal point in your living room. Although it is possible for the Riva™ 66 inset fire to be fitted into certain 'fireplace openings', to achieve such installations the deep versions of the Profil frames may be required to accommodate the extra depth of the wood burning and multi-fuel firebox. Alternatively, this model is ideal for new-build homes, barn conversions or where major refurbishment is taking place, and a larger opening can be constructed.

If you expect to burn smokeless fuel then, due to the larger firebox, a multi-fuel kit must be fitted. Not only does this decrease the amount of fuel you need to load but it also guides the fuel and cinders towards the grate for improved combustion. However, you may still burn wood with equal efficiency.

You can optimise the heating potential of the Riva™ 66 with two accessories. Firstly, a fan-assisted convection kit, which boosts warm air entering the room at the flick of a switch. Secondly, a ducting system that diffuses some of the heat to other points in the same room or into other living spaces. Or install both the fan and ducting system for ultimate heat distribution.

Both the inset fire and frames are finished in a choice of Stovax's Storm or Jet Black Metallic paints. There is also the option of specifying one of three exciting supplementary frame colours.

### KEY FACTS

Brand Stovax

Woodburner - Yes

Multi-fuel - Yes

Maximum efficiency 80%

Maximum log length 450mm (17 3/4")

Flue connection (internal diameter) 153mm (6")

Airwash - Yes

Cleanburn - Yes


Smoke Control Area approved – Yes

Additional Coloured Frame Options - Yes


### RIVA 66 INFORMATION

Width	Height	Depth	Weight	Nominal Heat Output & Range	Flue Diameter
650mm	550mm	395mm	110kg	8.0kW (2.8-11kW)	153mm

### OPENING DIMENSIONS

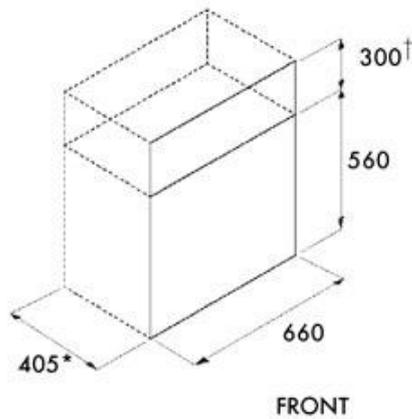

### CASSETTE

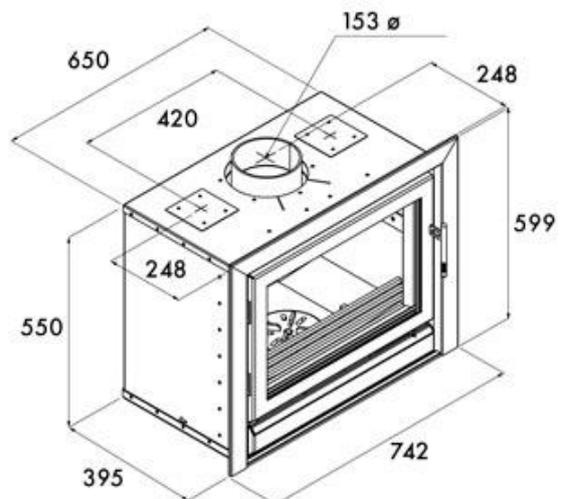

\*Dimension may be reduced to 355mm when using Profil or Avanti box spacer frame.

†Extra height required when fitting Warm Air Ducting kit.